

## SIMPLE STRAPS


### Characteristics

- ▶ Simple straps to fasten the tapping saddles to the pipe.
- ▶ Can be installed on ductile iron, fibre cement, polyethylene, oriented PVC pipes and others.
- ▶ Anti-galling system with double nut.
- ▶ The straps are supplied with 2 studs, 2 nuts and 2 ball joints.
- ▶ Supplied flat or, on request, curved.
- ▶ Highly adhesive rubber profile to insulate the strap and the pipe.
- ▶ Simple straps to fasten the tapping saddles to the pipe.


### MATERIALS

- ▶ Straps made of AISI 304 stainless steel.
- ▶ Studs in A2 stainless steel, nuts in A4 stainless steel.
- ▶ Acetal resin spherical washers.
- ▶ Blue EPDM rubber insulating profile.

### Advantages

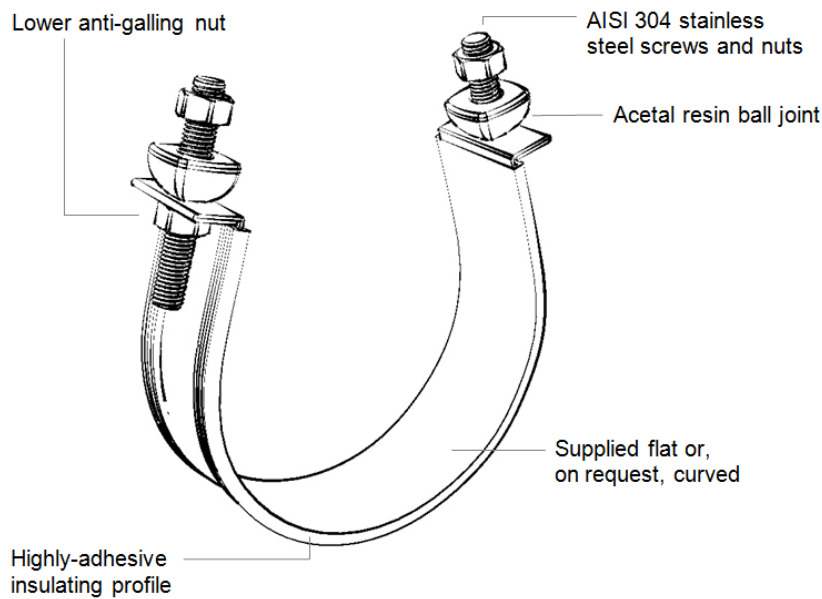

## SIMPLE STRAPS



Simple strap with ball joints, nuts and studs

## Codes, sizes and dimensions

SIMPLE STRAPS								
Code	Size	Range of use Main pipe material			Diameter range		Pcs per box	Weight per unit
		Iron	PE & PVC-O	Fibre cement	Min.	Max.		
OQ01010	Nº 1	60	63	60	63	80	50	0,340
OQ01020	Nº 2	65	75	70	70	90	50	0,350
OQ01030	Nº 3	80	90	80	90	110	50	0,420
OQ01035	Nº 3&4	80 y 100	90 y 110	80 y 100	90	130	50	0,450
OQ01040	Nº 4	100	110	100-C/D	110	125	50	0,450
OQ01050	Nº 5	---	125	100-E/F	125	140	50	0,500
OQ01060	Nº 6	125	140	125	140	160	30	0,520
OQ01070	Nº 7	150	160	150-C/D	160	180	30	0,590
OQ01080	Nº 8	---	180	150-E/F	180	200	30	0,630
OQ01090	Nº 9	175	200	175	200	220	30	0,670
OQ01100	Nº 10	200	225	200-C/D	220	245	30	0,720
OQ01110	Nº 11	225	250	200-E/F	245	270	30	0,780
OQ01120	Nº 12	250	280	250-C	270	290	25	0,830
OQ01130	Nº 13	---	---	250-C/D/E	290	315	25	0,890
OQ01140	Nº 14	300	315	---	315	335	25	0,940
OQ01150	Nº 15	---	355	300-C/D	335	355	25	0,990
OQ01160	Nº 16	350	---	---	375	395	---	1,090
OQ01170	Nº 17	---	400	350-C/D	395	415	---	1,140