

WIDE STRAPS

Characteristics


- ▶ Wide straps to fasten the flanged and PE outlet tapping saddles to polyethylene and oriented PVC pipes.
- ▶ Anti-galling system with double nut.
- ▶ The straps are supplied with 4 studs, 4 nuts and 4 ball joints.
- ▶ Supplied curved to make assembly easier.
- ▶ Highly adhesive rubber profile to insulate the strap and the pipe.

MATERIALS


- ▶ Wide straps made of AISI 304 stainless steel.
- ▶ Studs in A2 stainless steel, nuts in A4 stainless steel.
- ▶ Acetal resin spherical washers.
- ▶ Blue EPDM rubber insulating profile.



Advantages

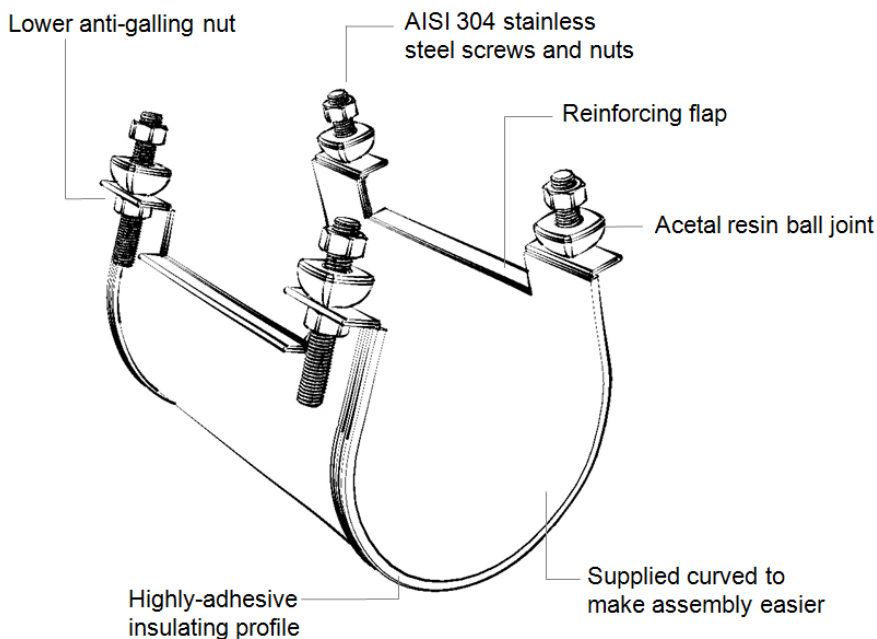

WIDE STRAPS



Wide strap with ball joints, studs and nuts

Codes, sizes and dimensions

WIDE STRAPS (for PE and oriented PVC pipes)				
Code	Size	Range of use Main pipe material		Weight per unit kg
		PE	PVC-O	
OQ02030	90	90	90	1,320
OQ02040	110	110	110	1,500
OQ02045	125	125	125	1,630
OQ02050	160	160	160	2,020
OQ02055	180	180	180	2,200
OQ02060	200	200	200	2,480
OQ02070	225	225	225	2,610
OQ02080	250	250	250	3,030
OQ02085	280	280	280	3,300
OQ02090	315	315	315	3,670
OQ02095	355	355	355	4,150